



Versatile and sturdy floor bunding.

Flexible Floor Bunding is manufactured from purpose extruded foam encased in heavy-duty PVC. The triangular profile collapses down as vehicles drive over it and then springs back to shape after the vehicle passes. This allows for a steady pass for forklifts without compromising their load as they cross the banded section.

This bund type is manufactured in a standard 75mm height which generates greater containment capacity in the case of small banded areas.


Before purchasing floor bunding ensure you check ground clearance of forklifts.

FEATURES

- ✓ Heavy duty, high visibility
- ✓ 900gsm PVC
- ✓ Extra bund capacity in small area
- ✓ "No Bounce" drive over bunding

APPLICATIONS

- Warehouses
- Across doorways
- Access points
- Hazardous liquid storage areas
- Work shops
- Wash Bays

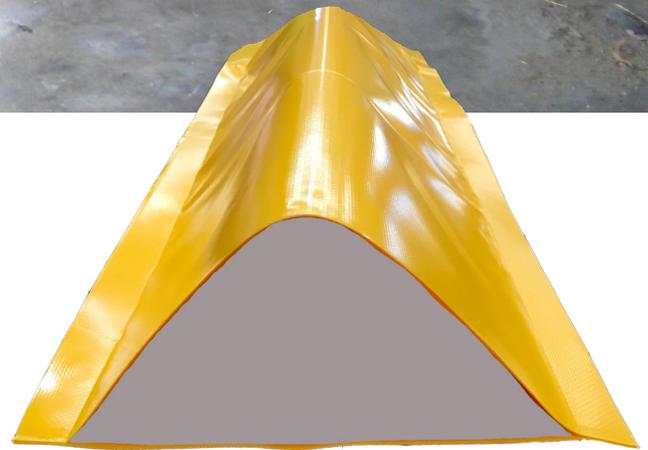

CODE	LENGTH	WIDTH	HEIGHT
AFBFLX575	5m	205mm	75mm
AFBFLX1075	10m	205mm	75mm
AFBFLX3075	30m	205mm	75mm
AFBFLX90C75	550m	205mm	75mm
AFBFLXK5	Installation Kit for 5m		
AFBFLXK10	Installation Kit for 10m		
AFBFLXKC90	Installation Kit for 90° Corner Join		

Installation Kit Available

- For each 10m length you will require:
- 2x tubes of adhesive sealant
 - Fasteners x 100 (5mm x 40mm nylon anchor mushroom head screw)
 - Aluminium Flat Bar x 20 (1mL x 32mmW)