



Stop. Control. Comply.

The DrainSAFE™ is a serviceable unit that retrofits inside a drain pit. Once installed it sits entirely beneath the drain grate. It does not impede wheel or foot traffic over the grate.

The mechanism that closes the unit and stops flow into the stormwater system is engaged manually by extending and turning the handle within the unit.


The stainless steel handle stows in a protective sheath within the diffuser body and beneath the grate. Once engaged, the telescopic handle will extend above ground level out of the grate.

Debris is captured in the diffuser body and hydrocarbons are absorbed by a material secured within the diffuser body.

INSTALLATION COMPONENTS

Included with the unit:

- HDPE pit skirt 1.2m x 1.2m x 15mm thick
- HDPE mounting blocks
- Sealant
- Concrete fastener

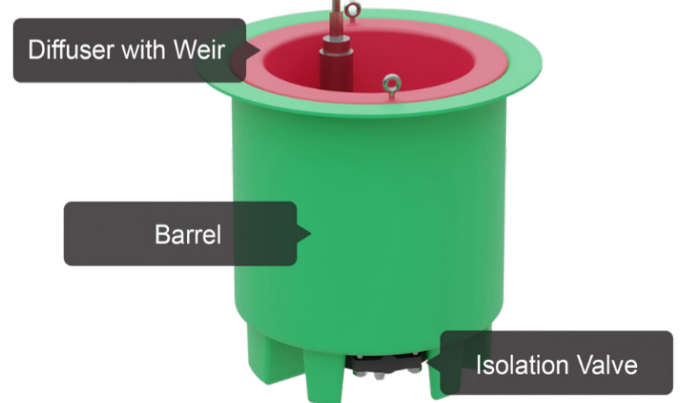

FEATURES

- ✓ Flow Rate of 33L/s
- ✓ UV Stabilised, Corrosion Resistant and Chemical Resistant
- ✓ High Vis Colour
- ✓ 4mm thick polyethylene
- ✓ Manufacture tolerance +/- 2mm

CODE	DIA	HEIGHT	WEIGHT	CAP
CHDS6	624mm	556mm	22kg	80L