



Easy to install, versatile and durable floor bunding.


Urethane Floor Bunding offers good chemical resistance and is suitable to bund areas containing tanks, drums and equipment. Ideal across doorways and entries. This UV stabilised urethane bunding is flexible yet durable.

The standard yellow colour is highly visible to pedestrians and vehicle traffic alike. Low bund height reduces trip hazards and the profile allows for the comfortable passing of forklifts.

The lengths and corner pieces are pre-drilled, allowing for easy installation. Minimum tools are required and the urethane bunding can be cut easily. Bunded areas can be quickly configured using the corner pieces.

Before purchasing floor bunding ensure you check ground clearance of forklifts.

*For high traffic areas or permanent installations, Spilmax's Aluminium Floor Bunding is recommended.

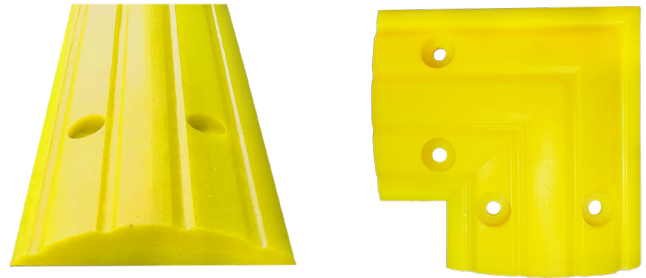

CODE	LENGTH	WIDTH	HEIGHT
AFBURE15025	1m	150mm	25mm
AFBURE90C25	200mm	200mm	25mm

FEATURES

- ✓ UV stable
- ✓ Highly visible
- ✓ Excellent chemical resistance
- ✓ Ideal across entry areas

APPLICATION EXAMPLES

- Warehouses
- Liquid storage areas
- Workshops
- Factories